


CONTURA COATING

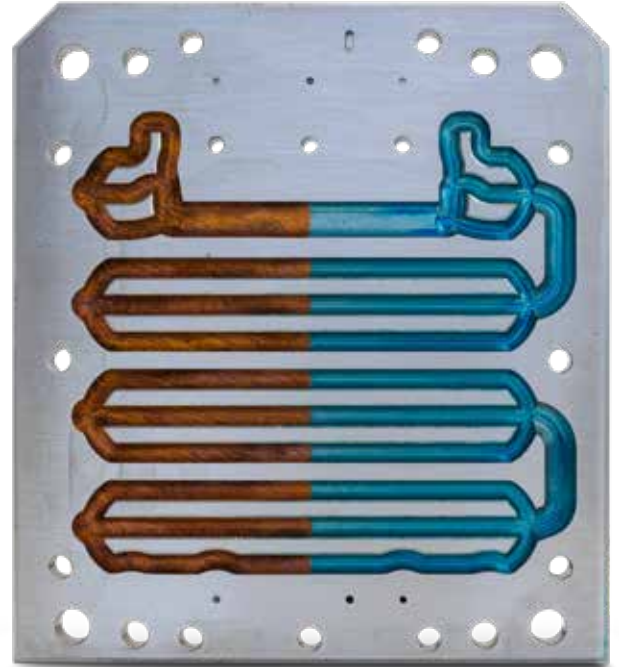

The function of a contour-following tempered tool insert depends on an unimpaired surface. That is why we now also offer our own channel coating as an option. Benefit now from the new CONTURA COATING.

Advantages CONTURA COATING:

- Temperature resistant up to 240°C
- polymer-based system
- Coating thicknesses 0.03 - 0.05
- high flexibility
- high adhesion
- available directly from CONTURA® as an option

Durable function

Economic efficiency due to:

- avoidance of downtimes
- stable process
- reduction of cleaning intervals

Avoidance of damage of this kind!



Here you can see severe corrosion damage that led to the breakage of the tool insert.



The advantages at a glance:

- polymer-based system
- Layer thicknesses 0.03-0.05 mm
- Temperature resistant up to 240 °C
- High flexibility, high adhesion, hard surface
- No masking of the cavity necessary
- only the channels are coated
- subsequent coating after cleaning also possible

